


**The ERGOMAT Infinity Deluxe Ultra Smooth is the ultimate smooth ergonomic mat. This durable 5/8" thick molded polyurethane mat is designed to provide ergonomic relief without hindering the movement of workers whose work process requires pivoting. The Deluxe has a durable, non-porous, closed cell surface which allows for moisture and chemical resistance, and added cleanability.**

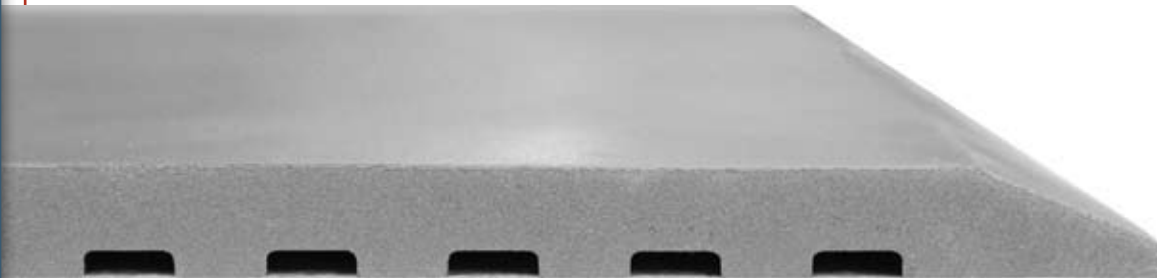

### Unmatched Safety Features

- Molded beveled edges
  - They will never curl up, eliminating tripping hazards
- Any size, any shape mat, always in one piece
  - No overlapping or worn-out connecting mats, also eliminating tripping hazards

### Highest Quality

- Raw virgin material only
  - Unbeaten durability and ergonomic relief
- Silicone & latex-free
- Not only anti-fatigue, but also true ergonomic benefits
  - Unique ergonomic designs, eliminating and preventing common problems encountered in standing environments stimulating the body to increase blood circulation and alertness that will reduce sick leave, workers' compensation and quality issues.
  - Solid mat throughout; no hollow bubbles that collapse

### The Deluxe Advantage

- The closed-cell protective surface of ERGOMAT Infinity mats is resistant to a broad range of occasional accidental liquid and chemical (except organic solvent) exposures. However, Infinity mats are intended for use in dry, nonabrasive environments. Uses that are inconsistent with this recommendation could void warranty coverage.
- Silver and white mats reflect extra light to save power and better illuminate critical visual functions
- UV Stable
- ESD Version available in black and silver color
- Cleanroom ISO Class 5 (100)

**6 years, 12 years for retail environments**

All Ergomat product lines are conditionally warranted against normal usage\* 24 hours a day, 7 days a week. The warranty does not cover damage caused by the mat being dragged or pulled from a heavy load or items being pushed or dragged across the product, such as skids or pallets. The warranty against chemicals, oils, liquids, or other matter differs with the type of mat. Please consult your dealer or an Ergomat Rep to select the correct mat for your environment. The warranty periods starts from the date of purchase. The warranty only covers the replacement of the product, no direct or indirect costs are covered.

\* It is considered normal usage when a person stands or walks on the Ergomat with regular footwear in an environment where the temperature is under 25° C (77° F) and the humidity is below 80%.

Over time in use, there may be yellowing of the white polyurethane on the underside of Infinity mats, similar to what you find with any white polymer. This can be a result of cleaning products used or other environmental factors such as humidity or UV lighting, etc. This color shift does not fall under the product warranty. It does not affect the durability, performance or functionality of the product in any way.

For a nominal additional charge, this mat can be supplied with yellow bevels, and/or holes for drainage and air flow.

Infinity Deluxe Ultra Smooth


ERGOMAT®



www.ergomat.com - info@ergomat.com

US: +1-440-282-4651  
 English (EU): +44 03308 280 084  
 Scandinavia: +45 70 22 18 40  
 German: +49 9524 30367-50  
 French: +33 1 446 410 28  
 Dutch: +31 73 613 05 30



<b>Properties</b>	<b>Standard</b>	 <b>Infinity Deluxe Ultra Smooth</b>
<b>Material</b>		Foamed Polyurethane
<b>Color</b>		Black, Silver, White, Blue, Red
<b>Weight</b>		2775 g +/- 50 g // 6.1 lbs +/- 0.1 lbs
<b>Length without beveled edges</b>		91 cm +/- 1% // 35.8" +/- 0.38"
<b>Width without beveled edges</b>		60 cm +/- 1% // 23.6" +/- 0.38"
<b>Thickness</b>		1.5 cm // 0.6"
<b>Density</b>	ISO 2781	400 kg/m <sup>3</sup> +/- 10 %
<b>Hardness</b>	DIN 53505	33-38 Sh A
<b>Surface Durability</b>	DIN 4649 test equipment with 2,5N load	30 m
<b>Electrical Resistance Surface point to point % 50 RH</b>	IEC-61340 4-1/ ESD STM7.1-2001	1 x 10 <sup>9</sup> Ω - 5 x 10 <sup>9</sup> Ω
<b>Thermal properties</b> Minimum use Maximum use Maximum short duration	The ergonomic properties remain	5°C // 40°F 27°C // 81°F
<b>Cleanroom application</b>	EN ISO 14644-1	ISO Class 5 (100)
<b>Warranty</b>		6 years, 12 years for retail environments

### Resistance Chart

(all the following recommendations are based on use of mats in dry areas, where spillage of liquids is removed shortly after exposure)

	<u>Surface</u>	<u>Back-side</u>
<b>Weak acid</b>	Good	Fair
<b>Strong acid</b>	Fair	Poor
<b>Weak alkalis</b>	Good	Fair
<b>Strong alkalis</b>	Fair	Poor
<b>Organic solvents</b>	Poor	Fair
<b>Alcohols</b>	Fair	Fair
<b>Hydrocarbons</b>	Excellent	Fair
<b>Water</b>	Excellent	Fair
<b>UV radiation</b>	Good	Poor

### Cleaning Method

#### Sweep or vacuum clean:

In case washing is necessary, wash surface with soapwater (pH range 2 - 9.5). If the backside of the mat gets wet during the washing, the mat must lie upside down until it is dry and all the moist has gone.