


DATASHEET

Static Shielding Ziplock Bag_ANT013SSB

Features:


- Metal “Faraday cage” layer shields products from electric energy inside and prevents static build-up
- Four layer protection guards against charges inside and out
- Semi transparent for easy content identification
- Surface resistance of 10^8 - $10^{11}\Omega$
- Conforms to EIA 625, EIA 541, ANSI/ESD S-20.20
- Custom sizes and print available on request
- Suitable for packing electronic products which are sensitive to static, eg PCB's, Electronic Components etc

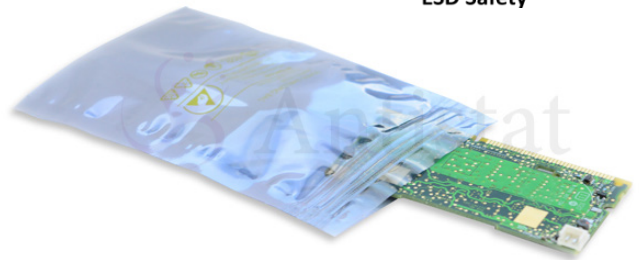

Outer Surface Dissipative Layer
Aluminized Polyester
Polyethylene
Inner Surface Dissipative Layer

Construction:

Our static shielding bags are constructed in four layers, consisting of a static dissipative polyester outer layer and a static dissipative polyethylene inner layer with a centre metallised shield layer.

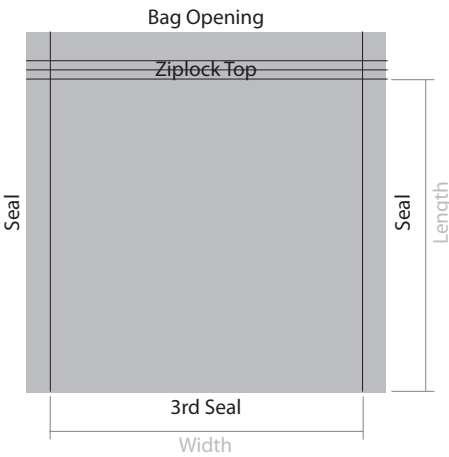


Our bags are manufactured from industry approved polyester and polyethylene laminates. The polyester dielectric works with the metal layer to provide a Faraday effect, the metal layer preventing penetration from damaging electrostatic fields. The specially processed polyethelene keeps tribocharging to a minimum.





Configuration(s):

Our bags are available in custom sizes or in several industry standard sizes. Bags are offered in a 2-seal configuration and bottom fold, with our standard flexographically printed artwork. Please note any bags that are longer than 24" will have a 3rd seal along the bottom edge. Our bags can also be personalised with your company logo on any bespoke orders.

STATIC SHIELDING BAG
ANT013SSB
THIS BAG IS ROHS COMPLIANT

ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING ELECTROSTATIC
DISCHARGE SENSITIVE DEVICES



Standard Bag Artwork:

Our static shielding bags are produced with the following sample artwork as standard. For further information on bespoke/printed orders, please contact one of our sales team. Please note there is a MOQ of 20,000 bags on all printed bags.

Static Shielding Ziplock Bag_ANT013SSB

Test Conditions:

The following results were taken under the following environmental test conditions:

Temperature: 23°C / Humidity: 12% RH

Technical Parameters:

Item:	Test Standard:	Result:
Film Thickness	Micron Meter	3mils 75 micron
Metal Layer Optical Transmission	ASTM D1003 (TOBIAS)	40% +/- 5% optical density
Surface Resistivity	STM 11.11	<10 ¹⁰ Ω/sq
Time for static removal	FTMS 101B Method 4046 - 5000-0V	<.03 Sec
Static Shielding - Energy Penetration	ESD-STM-11.31 @12% R.H.	<20 nJ
Static Shielding - Capacitive Probe	EIA 541 Appendix E	<25V
Friction Static	E1A541 Appendix C Avg.	TriboelectricNanocolombs Quartz +0.01 Teflon -0.09
Anti-erosion	FTMS 101C Method 3005	No visible spots
Tensile Strength	ASTM D882-91, Method A	MD 6530 psi TD 5800 psi
Tear Initiation	ASTM D1004 -94-Notched	MD 2.5 lbs./in TD 2.0 lbs
Puncture Resistance	ASTM D3420	>10 psi
Tear Resistance	ASTM D882	>8 psi
Burst Strength	FTMS 101 C Method 2065.1	50 psi Nominal
Heat Seal Temperature	-	250 - 375 °F
Heat Seal Pressure	-	30-70 PSI
Heat Seal Strength	(D1876-93) Vertrod bar sealer/heat	>12 lbs/in width (room temperature)
Breaking Elongation Rate	ASTM D882-91 Method A	MD 80% TD 85%
Appearance	GB/96-04-10	No delamination, burst seal, wrinkle, warp, break, foreign particle adherence, air bubble beyond sealing $\phi \leq 3\text{mm}$



Weller



Erem



Xcelite



STANNOL



Selta



MECHATRONIC SYSTEMS



Vision ENGINEERING



VIKING



ESD Safe Equipment

Static Shielding Ziplock Bag_ANT013SSB

Test Conclusion: (Date of Issue: 2009-11-10)

The shielding bag is tested accordance with the relevant test standard and requirements.

Test Item:	Test Method:	Measured Equipment(s):	MDL:
Lead (Pb)	IEC 62321:2008 Ed.1 Sec.8	ICP-OES	2mg/kg
Cadmium (Cd)	IEC 62321:2008 Ed.1 Sec.8	ICP-OES	2mg/kg
Mercury (Hg)	IEC 62321:2008 Ed.1 Sec.7	ICP-OES	2mg/kg
Hexavalent Chromium (Cr(VI))	IEC 62321:2008 Ed.1 Annex C	UV-Vis	2mg/kg
Polybrominated Biphenyls (PBBs)	IEC 62321:2008 Ed.1 Annex A	GC-MS	5mg/kg
Polybrominated Diphenyl Ethers (PBDEs)	IEC 62321:2008 Ed.1 Annex A	GC-MS	5mg/kg

Product Code:	Description:	Size (inches):	Size (mm):	Additional Notes:
WD013-0001	Static Shielding Ziplock Bag	3 x 5	76 x 127	Pack of 100
WD013-0003	Static Shielding Ziplock Bag	4 x 6	102 x 152	Pack of 100
WD013-0004	Static Shielding Ziplock Bag	5 x 8	127 x 203	Pack of 100
WD013-0020	Static Shielding Ziplock Bag	6 x 8	152 x 203	Pack of 100
WD013-0005	Static Shielding Ziplock Bag	6 x 10	152 x 254	Pack of 100
WD013-0006	Static Shielding Ziplock Bag	8 x 10	203 x 254	Pack of 100
WD013-0007	Static Shielding Ziplock Bag	8 x 12	203 x 305	Pack of 100
WD013-0008	Static Shielding Ziplock Bag	10 x 12	254 x 305	Pack of 100
WD013-0009	Static Shielding Ziplock Bag	10 x 14	254 x 355	Pack of 100
WD013-0010	Static Shielding Ziplock Bag	12 x 16	305 x 406	Pack of 100
WD013-0011	Static Shielding Ziplock Bag	12 x 18	305 x 457	Pack of 100

Note: Other sizes available upon request.