



**RELENTLESS STRONG
PICK-AND-PLACE**

Strong, Flexible, Adaptive & Modular



puma. solution.

RELENTLESS PLACING AND DISPENSING

Introducing – The Puma – State of the art technology. Expandable in any direction.



LINE SOLUTION

CELL SOLUTION

combined process.

- Highspeed Placement and Jet-Dispensing
- 2 or 4 placement-axes and 1-2 dispense processes

productivity.

- Optimum 18'100 cph, up to 54'300 cph inline
- Optimum 145'000 dots/h (with Piezo Jet Valve)

small footprint.

- Up to 280 Feeder on 2 m² (up to 420 inline)
- PCB size 560 x 610 mm, optional 1'800 x 610 mm

mineral cast chassis.

- No vibration, symmetrical mineral casting
- No warpage, no thermal drift

quick changeover.

- Nonstop production, Smart electronic feeder
- Nonstop feeder and production changeover

linear motors.

- Fast, reliable double drive linear motors
- No maintenance, longest lifetime

www.essemtec.com

EXPANSION IN ANY DIRECTION.
VERSATILE FROM PROTOTYPING
TO HIGH SPEED PRODUCTION.



Configurable heads with 1-4 placement-axis. 2,5D and 3D dispensing and jetting, High resolution digital Cognex vision system with auto component teach-in and irregular ball recognition.



Full operator support - Automated error analysis & KPI. Training, support and troubleshooting via advanced remote access. Investment protection; all options and heads retrofittable. Machine expansion in any direction.



Multi flexible feeder, multi lane cassette or highly accurate single lane feeder. Tape, Stick, Strip, Palettes and Tray slider. Largest component spectrum; 01005 up to 80 x 80 mm, component height up to 25 mm.



MULTITALENT SOFTWARE AT YOUR FINGERTIPS State of the art, full graphics, 21.5", 16:9 HD wide touch screen, Windows 10 – 64 bit, fingertip operation, universal CAD conversion, zoom at camera windows, all-in-one job planning, setup optimisation, stock management, ERP/MES connection, data analysis, line management and more.

optional.


Laser Height Measurement Compensation of PCB warpage

Dispensing and Jetting Vacuum cleaning station for nozzles and tips


Tray Slider Unique system to increase the amount of trays

Increase Boardsize Table extension to increase the processable board size

Additional: Electrical component test system, vision box to increase component size to be placed, reel-to-reel, bulk components and more

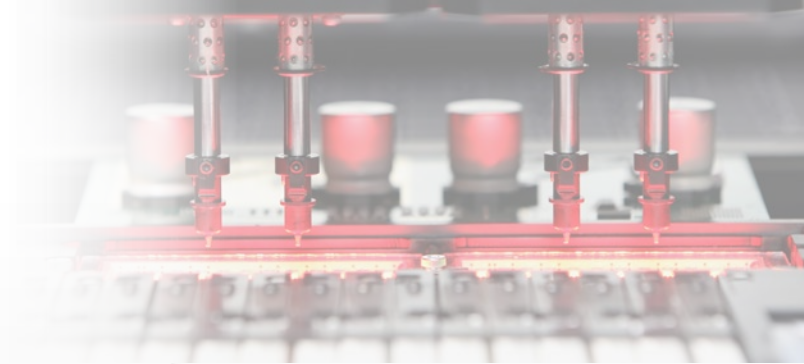

CHOOSE YOUR PREFERENCES

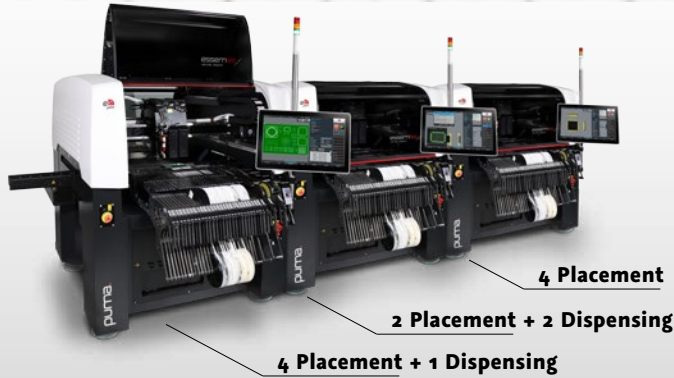

		puma.	puma ²	puma ⁺
Productivity	Optimum placement speed	6'700 cph (1-axis)	11'200 cph (2-axes)	18'100 BE/h (4-axes)
	Optimum jetting speed	up to 145'000 dots/h		
Feeder	Feeder capacity 8 mm tape	260 (140 inline)	260 (140 inline)	280 (160 inline)
Components	Component size range	01005 - 33 x 80 mm, optional 80 x 80 mm		
Accuracy	Placement accuracy (x, y)	50 µm @ 3σ		
PCB	Max. PCB dimensions	560 x 610 mm (22 x 24"), optional 1'800 x 610 mm (71 x 24")		
Dimensions	Machine footprint	1'557 x 1'357 mm (61 x 53")		



FLEXIBLE SMT SOLUTIONS

Essemtec AG

Mosenstrasse 20
CH-6287 Aesch/LU
Switzerland

Phone: +41 (0)41 919 60 60
Fax: +41 (0)41 919 60 50
Mail: info@essemtec.com

Wildlife consistently shows us with breathtaking flexibility how nature can adapt itself to the many different demands of its environment; that is what inspires us! Essemtec AG is a privately owned company with its development and production site in Switzerland. The product portfolio comprises of production equipment for electronic assembly and more. Our high tech solutions can be adjusted quickly and easily to meet wide ranging requirements; we are therefore able to respond to all manner of customer requests. That's why "naturally adaptive" is our motto across all ranges.

Disclaimer & Copyright:

The information contained in this brochure is for general information purposes only. For more information see the specification sheet. All materials contained in this brochure are copyright © Essemtec AG, Switzerland, November 2017

