

Contents

Features

Specifications

Continual printability

Viscosity variation

Super fine pattern wetting

Anti-pillow

Voiding

Halogen contents

Other properties

Alloy thermal cycle test


T/C - Cross-section

Handling guide

Koki no-clean **LEAD FREE** solder paste

High-reliability Low Ag Lead Free Solder Paste **S1XBIG58-M500-4**

Product information

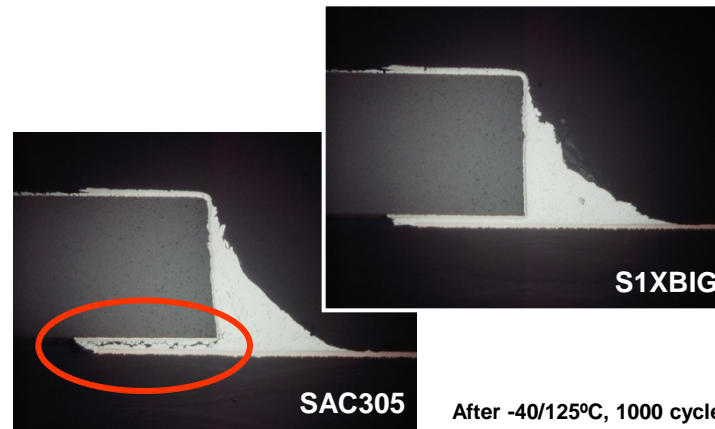

This Product Information contains product performance assessed strictly according to our own test procedures and may not be compatible with results at end-users.



Contents

Features

Specifications

Continual printability

Viscosity variation

Super fine pattern wetting

Anti-pillow

Voiding

Halogen contents

Other properties

Alloy thermal cycle test

T/C - Cross-section

Handling guide

Product features

- Solder alloy composition is Sn 1.1Ag 0.7Cu 1.8Bi +Ni.
- HIGH RELIABILITY Low-Ag Alloy compared with conventional low-Ag alloys
- PERFECT MELTING and wetting at super fine pitch micro components (>0.25mm dia. CSP, 0603 chip).
- Stable viscosity performance due to prevention with chemical reaction between solder powder and flux.
- Liquidus point (223°C) may allow to apply the CONVENTIONAL reflow profile for SAC305.
- Conforms to HALOGEN FREE standard (Cl+Br = Less than 1500ppm) BS EN14582.



Contents

Features

Specifications

Continual printability

Viscosity variation

Super fine pattern wetting

Anti-pillow

Voiding

Halogen contents

Other properties

Alloy thermal cycle test

T/C - Cross-section

Handling guide

Specifications

Application		Printing - Stencil
Product		S1XBIG58-M500-4
Alloy	Alloy Composition (%)	Sn 1.1Ag 0.7Cu 1.8Bi +Ni
	Melting point (°C)	211 - 223
	Shape	Spherical
	Particle size (µm)	20 - 38
Flux	Halide Content (%)	0
	Flux Type	ROLO* ³
Product	Flux Content (%)	11.2 ± 1.0
	Viscosity* ¹ (Pa.s)	220 ± 30
	Copper plate corrosion* ²	Passed
	Tack Time	> 24 hours
	Shelf Life (0-10°C)	6 months
Optional powder size (µm)		20 - 45: S1XBIG48-M500-4

*1. Viscosity :

Malcom spiral type viscometer, PCU-205 at 25°C 10rpm

*2. Copper plate corrosion :

In accordance with IPC J-STD-004A

*3. Flux type :

According to IPC J-STD-004A



Contents

Features

Specifications

Continual printability

Viscosity variation

Super fine pattern wetting

Anti-pillow

Voiding

Halogen contents

Other properties

Alloy thermal cycle test


T/C - Cross-section

Handling guide

Continual printability

Test condition

- Stencil : 0.12mm thickness, laser cut stencil
- Printer : Model YVP-Xg YAMAHA Motor
- Squeegee : Metal blade, Angle - 60°
- Print speed : 40 mm/sec
- Atmosphere : 24-26°C (50-60%RH)
- Test pattern : 0.25 mm dia., 0.4mmP QFP pattern

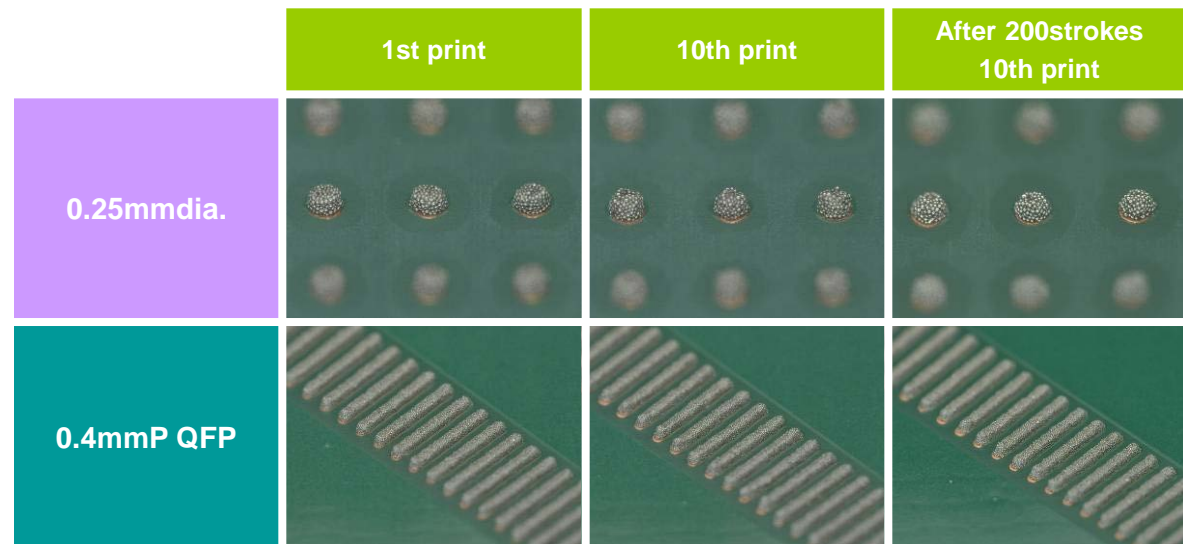

Consistent and quality printability over the continual prints.



Contents

Features

Specifications

Continual printability

Viscosity variation

Super fine pattern wetting

Anti-pillow

Voiding

Halogen contents

Other properties

Alloy thermal cycle test

T/C - Cross-section


Handling guide

Viscosity variation

Test condition

Print (knead) solder paste on the sealed-up stencil continually up for 24 hours to observe viscosity variation.

- Squeegee : Metal blade, Angle - 60°
- Squeegee speed : 30mm/sec.
- Print stroke : 300mm
- Printing environment : 24-26°C, 40-60%RH

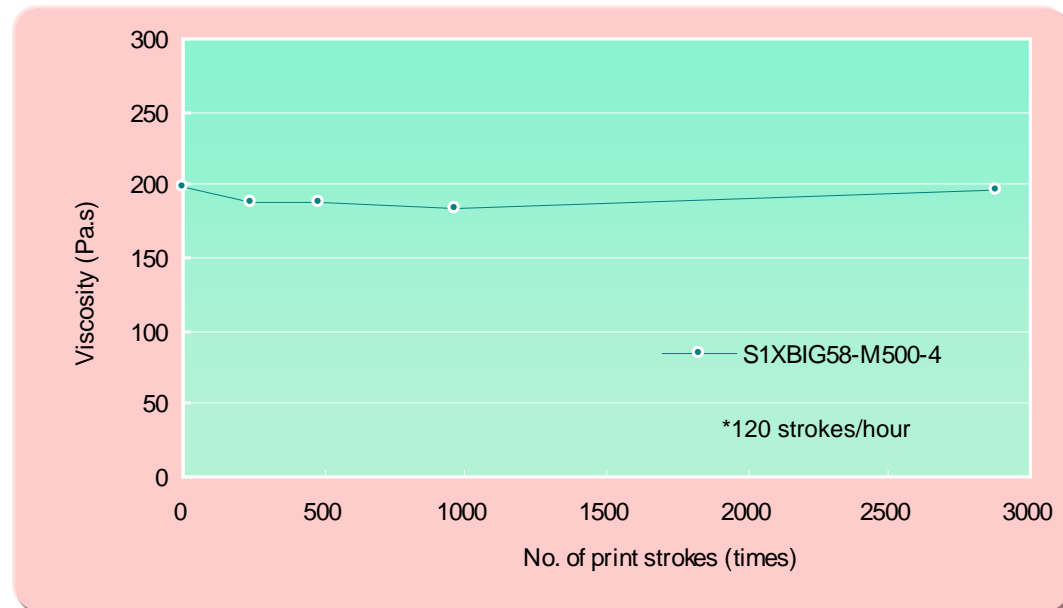

A newly developed flux formula has succeeded to realize consistent long term printability by preventing excessive viscosity drop due to shear thinning and excessive increase due to chemical reaction between solder powder and flux medium during the repeated rolling.



Contents

Features

Specifications

Continual printability

Viscosity variation

Super fine pattern wetting

Anti-pillow

Voiding

Halogen contents

Other properties

Alloy thermal cycle test




T/C - Cross-section

Handling guide

Super fine pattern wetting

Test condition

- Material : Glass epoxy FR-4
- Surface treatment : OSP
- Stencil thickness : 0.12mm (laser cut)
- Pad size : 0.25mm dia.
- Component: 0603R (0201) chip, 100%Sn
- Stencil aperture : 100% aperture opening to pad
- Heat source : Hot air convection
- Atmosphere : Air
- Reflow profile : See below

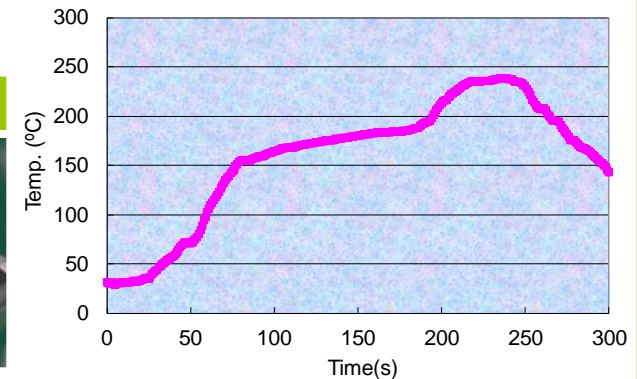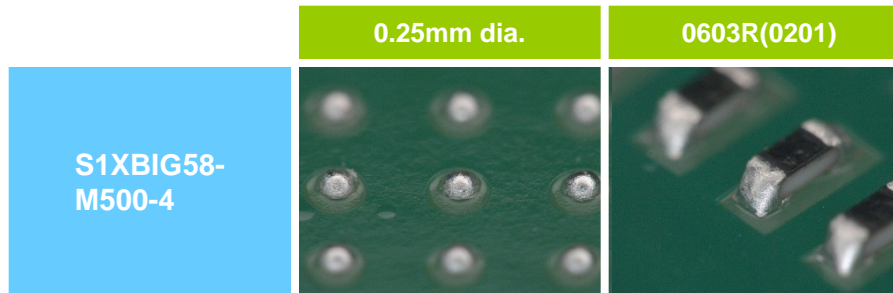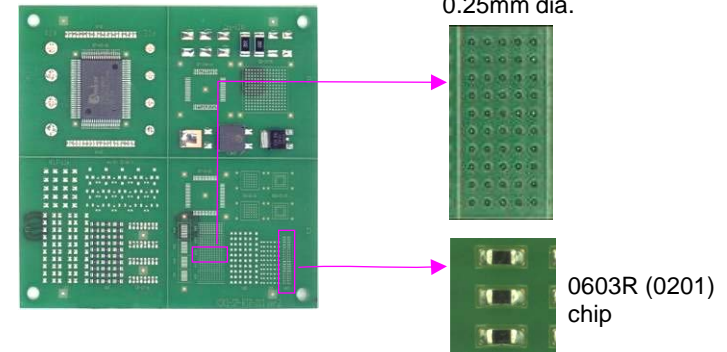

Larger relative surface areas of solder paste exposed due to miniaturization of components (CSP, 0603 chips), often causes incomplete coalescence of the solder due to excessive oxidation during the reflow. An improved flux formula ensures complete coalescence by minimum deterioration of barrier performances .



Contents

Features

Specifications

Continual printability

Viscosity variation

Super fine pattern wetting

Anti-pillow

Voiding

Halogen contents

Other properties

Alloy thermal cycle test


T/C - Cross-section

Handling guide

Anti-pillow test

Test condition

- Material : Glass epoxy FR-4
- Surface treatment : OSP
- Stencil thickness : 0.12mm (laser cut)
- Pad size : 0.8 x 0.8mm diameter
- Component : 0.76mm ball SAC305
- Stencil aperture : 100% aperture opening to pad area
- Heat source : Solder pod 275°C
- Mount interval: 10sec.

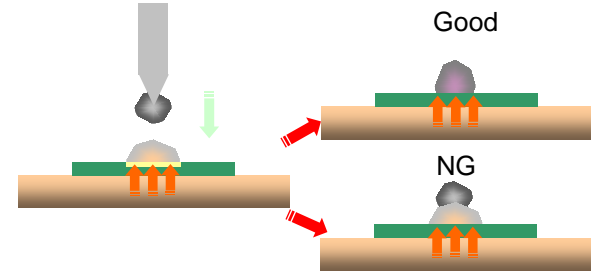

Drop a solder ball every 10 sec. after the solder paste has melted to see the heat durability of flux.



		30sec	40sec	50sec
S1XBIG58-M500-4				
Conventional solder paste				

M500-4 retained the activation even up to 50sec. and allowed the complete merger of the solder bump with the molten solder, while the conventional solder paste resulted in the partial merger only 30sec. after the solder paste has melted. The results demonstrates that M500-4 shall effectively prevent the occurrence of head-in-pillow defect.



Contents

Features

Specifications

Continual printability

Viscosity variation

Super fine pattern wetting

Anti-pillow

Voiding

Halogen contents

Other properties

Alloy thermal cycle test



T/C - Cross-section

Handling guide

Voiding

Test condition

- Material : Glass epoxy FR-4
- Surface treatment : OSP
- Stencil thickness : 0.12mm (laser cut)
- Stencil aperture : 100% aperture opening to pad area
- Components : Pwtr, 6330R(2512) -100% Sn
BGA ball - SAC305
- Heat source : Hot air convection
- Atmosphere : Air
- Reflow profile : Same as "Super fine pattern wetting"

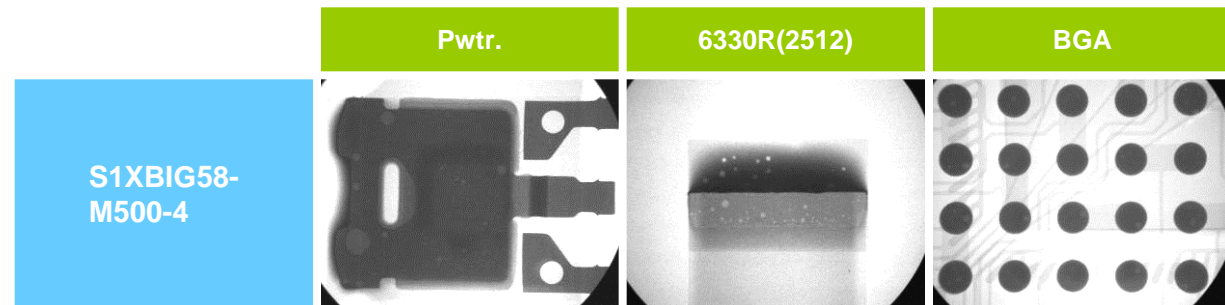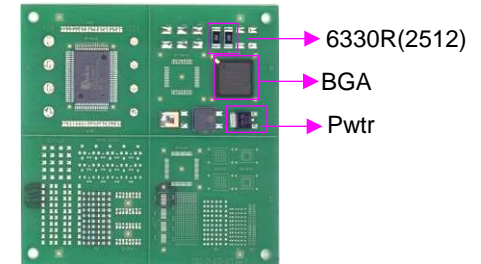

M500-4 ensures low voiding regardless of the type and size of the components.



Contents

Features

Specifications

Continual printability

Viscosity variation

Super fine pattern wetting

Anti-pillow

Voiding

Halogen contents

Other properties

Alloy thermal cycle test

T/C - Cross-section

Handling guide

Halogen contents

Test condition

* BS EN14582

Elements	Results
F	Not detected
Cl	Not detected
Br	Not detected



Halogen contents (ppm)

Conforms to Halogen-free standard (Cl+Br: less than 1500ppm) BS EN14582.



Contents

Features

Specifications

Continual printability

Viscosity variation

Super fine pattern wetting

Anti-pillow

Voiding

Halogen contents

Other properties

Alloy thermal cycle test

T/C - Cross-section

Handling guide

Other properties

Item	Result	Method
Tack time	> 24 hours	JIS Z 3284
Heat slump	0.3mm pass	JIS Z 3284
Solder balling	< Category 3	JIS Z 3284
Copper mirror corrosion	Type L	IPC J-STD-004A
Copper plate corrosion	Pass	IPC J-STD-004A JIS Z 3284
Voltage applied SIR	> 1E+9	IPC J-STD-004A JIS Z 3284



Contents

Features

Specifications

Continual printability

Viscosity variation

Super fine pattern wetting

Anti-pillow

Voiding

Halogen contents

Other properties

Alloy thermal cycle test


T/C - Cross-section

Handling guide


Thermal cycling test; Share strength

Test condition

- Thermal cycling conditions : -40/+125°C, 60min./cycle x 1000cycles
- Testing machine : SEISIN SS30WD

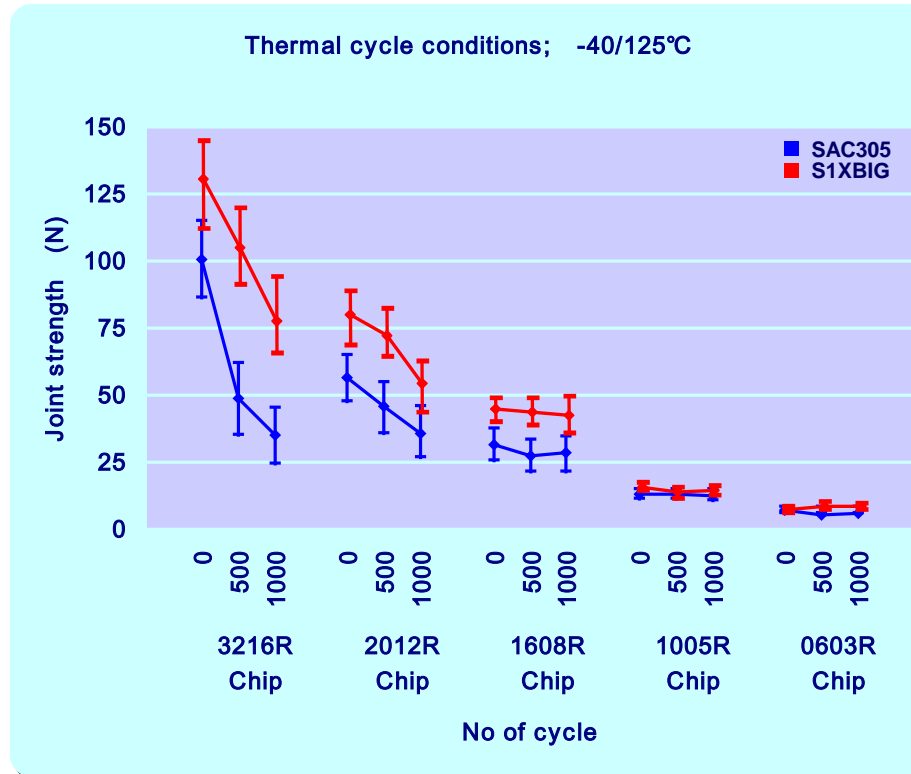


Test board & components



- 3216R (30pcs)
- 2012R (30pcs)
- 1608R (30pcs)
- 1005R (30pcs)
- 0603R (30pcs)

PCB: FR4
 Surface finish: OSP
 Cu thickness : 18μm
 PCB thickness : 1.6mm

Pad size

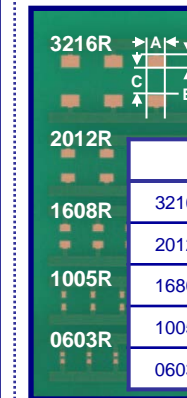

		(mm)		
		A	B	C
2012R				
1608R	3216R	1.40	0.90	2.20
	2012R	1.05	0.60	1.30
1005R	1680R	0.80	0.50	0.80
0603R	1005R	0.30	0.40	0.50
	0603R	0.30	0.23	0.25

S1XBIG solder alloy exhibits higher shear strength than SAC305, especially with relative large components due to solid solution effect of Bi containing alloy.



Contents

Features

Specifications

Continual printability

Viscosity variation

Super fine pattern wetting

Anti-pillow

Voiding

Halogen contents

Other properties

Alloy thermal cycle test

T/C - Cross-section

Handling guide

Thermal cycling test; Cross-sectional observation

T/C condition	Alloy	SAC305		S1XBIG		
3216R Chip -40/+125°C	Before					
	500cycles					
		1000cycles				

No cracking or rupture occurred in the solder fillets formed by S1XBIG, while SAC305 solder fillets show some cracking after 1000 cycles.



Contents

Features

Specifications

Continual printability

Viscosity variation

Super fine pattern wetting

Anti-pillow

Voiding

Halogen contents

Other properties

Alloy thermal cycle test

T/C - Cross-section

Handling guide

Handling guide

1. Printing

1) Recommended printing parameters

(1) Squeegee

- | | |
|-------------------|-------------------------------|
| 1. Kind | : Flat |
| 2. Material | : Rubber or metal blade |
| 3. Angle | : 60° (rubber) or metal blade |
| 4. Pressure | : Lowest |
| 5. Squeegee speed | : 20~100mm/sec. |

(2) Stencil

- | | |
|----------------------|--|
| 1. Thickness | : 150~100μm for 0.65~0.4mm pitch pattern |
| 2. Type : | : Laser or electroform |
| 3. Separation speed | : 7.0~10.0mm/sec. |
| 4. Snap-off distance | : 0mm |

(3) Ambiance

- | | |
|----------------|--|
| 1. Temperature | : 23~27°C |
| 2. Humidity | : 40~60%RH |
| 3. Air draft | : Air draft in the printer badly affects stencil life and tack performance of solder pastes. |

2. Shelf life

0~10°C : 6 months from manufacturing date

* Manufacturing date can be obtained from the lot number

ex. Lot No. **4 02 04 2**

→	No. of lot	: 2nd
→	Date	: 4th
→	Month	: Feb
→	Year	: 2014



Contents

Features

Specifications

Continual printability

Viscosity variation

Super fine pattern wetting

Anti-pillow

Voiding

Halogen contents


Other properties

Alloy thermal cycle test

T/C - Cross-section

Handling guide

Handling guide – Recommended reflow profile

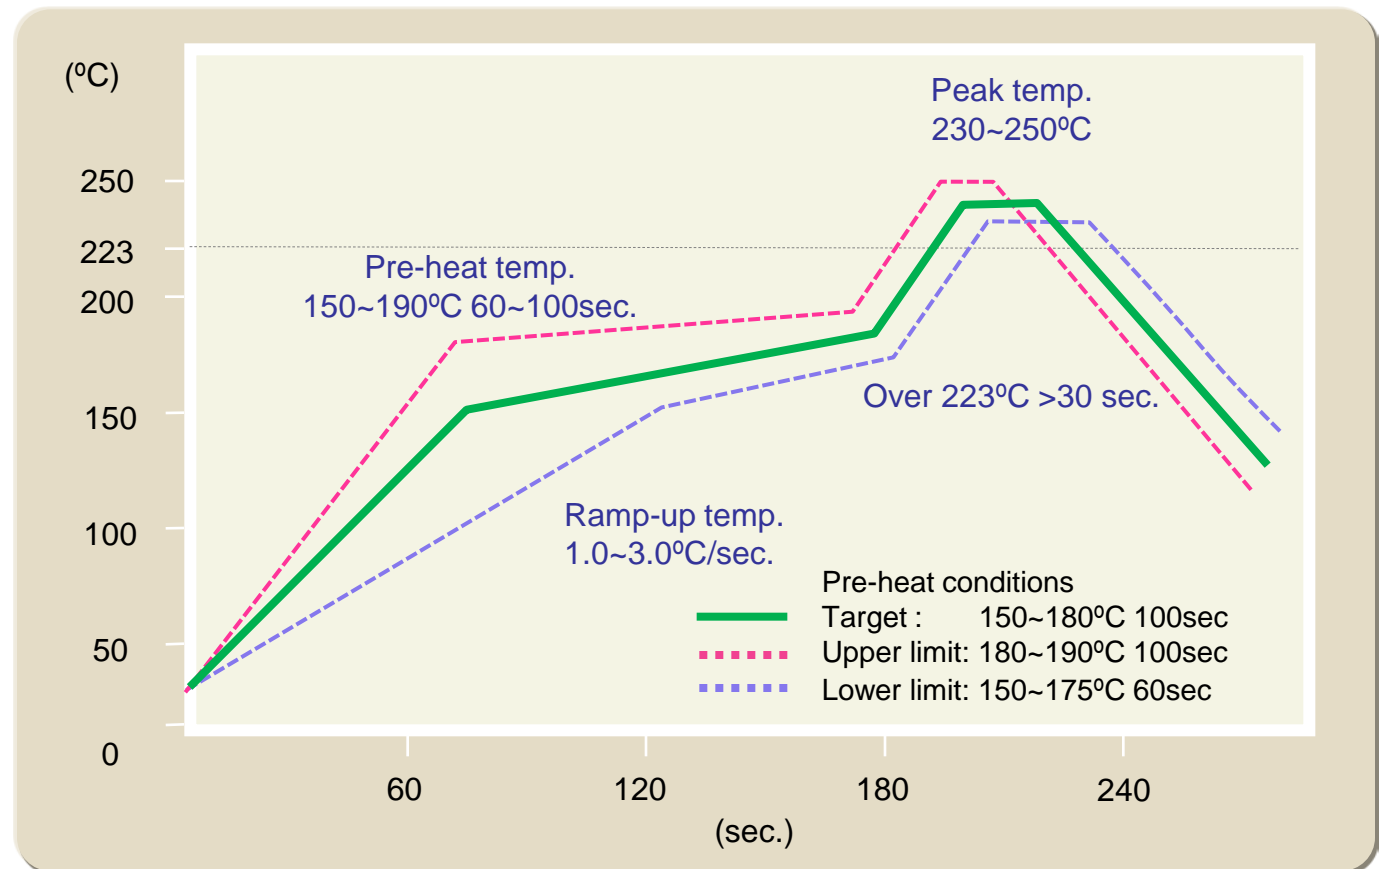

Contents

Features

Specifications

Continual printability

Viscosity variation

Super fine pattern wetting

Anti-pillow

Voiding

Halogen contents

Other properties

Alloy thermal cycle test

T/C - Cross-section

Handling guide

Handling guide – Recommended reflow profile

