



TECHNICAL DATASHEET


ESD & Technical Workbenches

VIKING

SKU: CONSTANT Series Workbenches



When ordering, please mention whether ESD or technical version required.

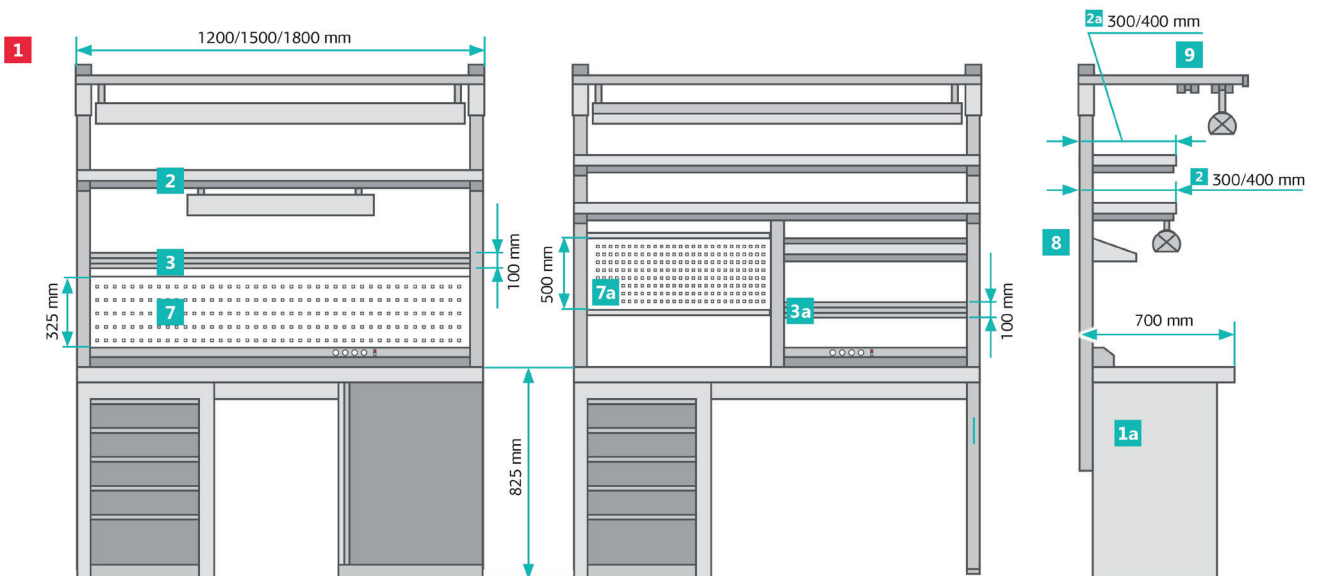





TECHNICAL DATASHEET

ESD & Technical Workbenches

VIKING

SKU: CONSTANT Series Workbenches

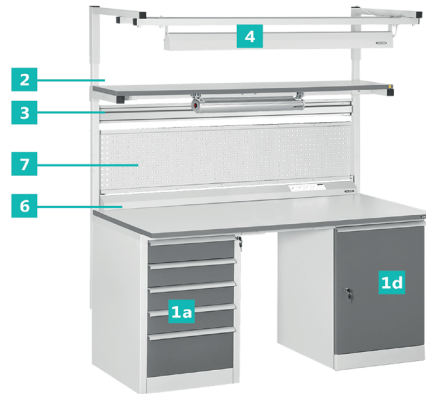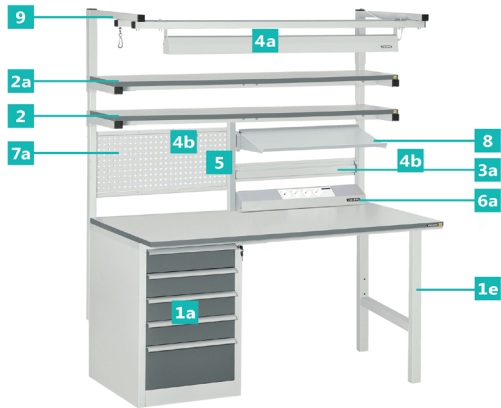

1 SR CONSTANT workbenches   
 These workbenches cannot be height-adjusted.
 Tabletop thickness 25 mm.
 300 kg  300°C

As a support, CONSTANT workbenches can have:







- 1a** Cabinet unit with five drawers on telescopic runners and a lock (+DR-05 in code);
- 1b** Cabinet unit with three bigger drawers on telescopic runners and a lock (+DR-03 in code);
- 1c** Cabinet with two shelves and a lock (+ TMB-01 in code);
- 1d** Cabinet with one drawer and two shelves in a locked section (+ TMB-02 in code);
- 1e** Legs.

CONSTANT worktop supports can be used in any combination for 1500 mm and 1800 mm width workbenches. 1200 mm width workbenches should have legs as one support.

Workbench with 3-drawer cabinet and 2-shelves cabinet has +DR-03+TMB-01 in code, for example 1500 mm width workbench ordering code SR-15-7+DR-03+TMB-01.



Cabinets and drawer units used as worktop supports are bicolored by default.

2 PO Main shelf   
 Rear racks included.
 1000-1800 mm  50 kg  300/400 mm





2a PO/1 Additional shelf   
 Requires PO Main shelf to be installed. Rear racks excluded.
 1100-1800 mm  50 kg  300/400 mm




3 RK Bin rail  
3a 1/2 RK Bin rail  




Aluminum rail for bin storage placed along workbench length.



 RK — 1110/1410/1710×100 mm  10 kg



 1/2 RK — 530/680/830×100 mm



4 DL/A Workbench lighting   
 An aluminum case with two energy-efficient luminescent 54 W lamps, light direction regulation and shadowless reflector provided. Quick switching on without shimmering, no strobing freeze.
 Provides at least 1200-lux illuminance at 1000 mm distance from the light source.
 500-1350 mm from tabletop



4a DL/S2 Workbench LED lighting  
 An aluminum case with LED lamp and light direction regulation.
 - Color temperature 4700-5300 K  500-1350 mm from tabletop
 Provides at least 1200-lux illuminance at 1000 mm distance from the light source.







4b DL/N2 Under-shelf local lighting  
 Additional lighting can be mounted under the main shelf or attached to perforated panel. Suitable for any workbench equipped with upper modules. Angle adjustment ±60°
 - 2 versions: 60 cm length and 90 cm length
 - Color temperature 4700-5300 K. Provides at least 1000-lux illuminance at 1000 mm distance from the light source.
 Also available with dimmer.  See more on p. 46




5 Middle upright for all items  
 Required to hold any 1/2 item. Three sizes to match standard workbench width.







6 EP Power panel  



6a 1/2 EP Power panel  
 An aluminum case/ half-size case with four sockets, protective contact, switch and 3 m cable. Can be equipped with additional sockets, fuses, phone jacks and earth leakage circuit breakers.
 - Nominal load capacity: 10 A

7 PFP Perforated panel  

7a 1/2 PFP Perforated panel  
 Panel can be equipped with different holders for additional equipment and tools storage.
 PFP — 1190/1490/1790×325 mm  10 kg
 1/2 PFP — 610/760/910×500 mm  See more on p.47

8 PN Half-sized Sloped shelf   

8a PNP Full-sized Sloped shelf   
 Sloped shelf with 10-55° angle adjustment provides comfort monitoring of working equipment.
 PN 534/684/834×295 mm  50 kg
 PNP 1111/1411/1711×295 mm

9 IP Cantilever  
 Upper slat for fastening drawings, additional instruments. IP Cantilever can be additionally equipped by retracting KL-1200 mechanism.