




# Screw Removal

---


## PZ-32

## SCREW REMOVAL PLIERS JS

- Vertical serrations bite and grip a screw head without slippage
- Also good for Truss head screw. \*Truss: Lower-profile dome head
- Serrated side teeth lined consecutively, inter-meshed with each other
- Black oxide finish to increase rust-resistance!
- Owing to T-shaped forging handles, the handle sleeve will not twist or slip off during heavy duty use.

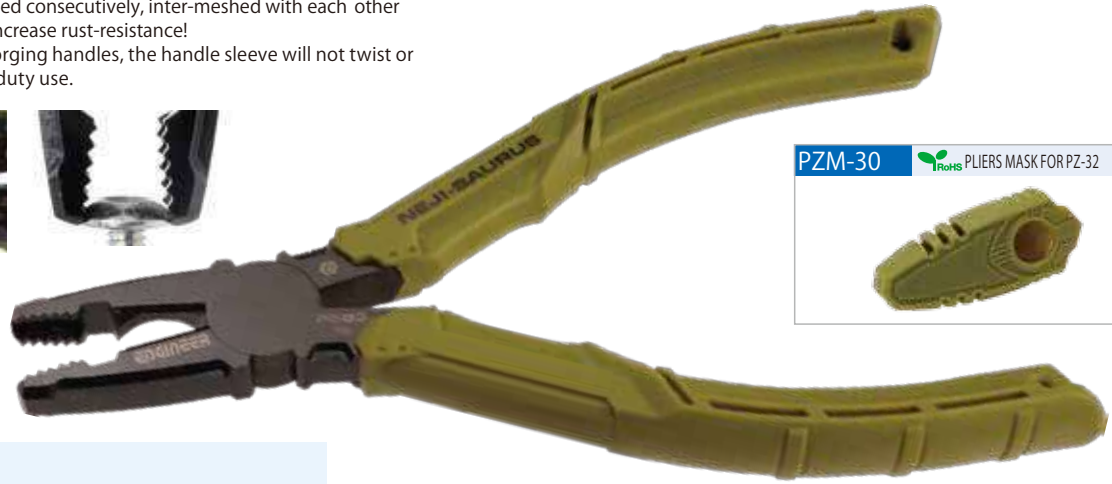

### PZM-30 PLIERS MASK FOR PZ-32

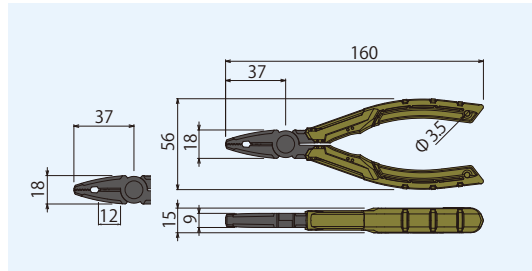

Inter-meshed, never let go.




Strap hole goes through the steel handle.



| Item No. | Size  | Material                         | Hardness | Cutting Capacity        | Wgt. | Safety Hole |
|----------|-------|----------------------------------|----------|-------------------------|------|-------------|
| PZ-32    | 160mm | Body:Carbon Steel<br>Handles:TPR | HRC60±2  | φ3.2mm<br>(copper wire) | 125g | φ3.5mm      |


■ Screw head size

| Top Jaws  |
|---|
|  φ3~φ9.5mm |

## PZ-64•65•66

## SCREW REMOVAL LOCKING PLIERS

- Vertically serrated jaws bite a screw head while locking it securely. It helps to optimize your hand strength for twisting off stubborn screws.
- Also good for Truss head screw. \*Truss: Lower-profile dome head
- Quick release mechanism, just open the handles to unlock the gripping jaws
- Rubber handles provide you with a comfortable grip.

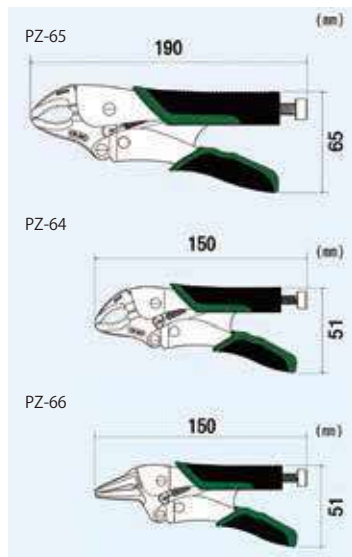

PZ-65



PZ-64



PZ-66






PRODUCT VIDEO



| Item No. | Max.Jaws | Holdable Round Bar | O.A. Length | Hardness (Jaws) | Wgt. | Material                  |
|----------|----------|--------------------|-------------|-----------------|------|---------------------------|
| PZ-64    | 38mm     | Max. φ28mm         | 150mm       | HRC57±3         | 205g | Body:Cr-Mo<br>Handles:TPR |
| PZ-65    | 48mm     | Max. φ40mm         | 190mm       |                 | 400g |                           |
| PZ-66    |          | Max. φ8mm          | 150mm       |                 | 210g |                           |

■ Screw head size

| Item No. | Top Jaws  |
|----------|---|
| PZ-64    |  φ3~φ9.5mm |
| PZ-65    |  φ3~φ9.5mm |
| PZ-66    |  φ3~φ5.5mm |